

# RIVA QUARTZ

**Black**                      **3.5"**                      **Select**  
Name                      Width                      Grade



## DESCRIPTION

This product has been manufactured according to the European Norm EN13489. Product: Multilayer Parquet Oak Plank.

## COMPOSITION

Structure consists of a Birch Phenolic Plywood and an Oak Plank Top Layer, both elements glued with polyvinyl acetate adhesives, in accordance to the qualification CARB2.

## DIMENSIONS

<b>Total thickness (in)</b>	5/8" (16mm)
<b>Top Layer thickness (mm)</b>	3.2 mm
<b>Plywood thickness (mm)</b>	12 mm
<b>Length (ft)</b>	21.25" (540 mm)
<b>Width (in)</b>	3.5" (90mm)

## DIMENSIONS TOLERANCES (EN 13647)

<b>Length</b>	Nominal $\pm$ 0.1%
<b>Width</b>	Nominal $\pm$ 0.2%
<b>Cupping</b>	0.2% of nominal width
<b>Banana</b>	0.1% nominal length

## GRADE

Select. Minimal knots.  
Maximun diameter of 10 mm and repaired with filler.  
Character solid knots up to 3" (70mm) permitted. Open knots with fill less than 2" (50mm) permitted. Repaired cracks or splits within the planks are permitted. No filled cracks/splits on the ends of the planks. Natural color variation is to be expected. Sapwood may be present and allowed if the color blends into the plank. No bleached sapwood allowed.

<b>Finished</b>	Bona® Ultra Matt Lacquer
<b>Impact Resistance</b>	Ø medium of deep 8.59 mm
<b>Dimensional Stability (EN-1910):</b>	Movement $\leq$ 0.29%
<b>Formaldehyde Emission (EN-120)</b>	EO. CARB2 Comply
<b>Thermal conductivity (UNE-92-202)</b>	0.14W/moK
<b>Noise &amp; Impact Isolation (UNE-EN-ISO 140-8)</b>	$\Delta$ Lw: 17 dB
<b>Fire Reaction (UNE 23727)</b>	Cfl-S1
<b>Profiling System</b>	Tongue & Groove, beveled 2 sides
<b>Warranty</b>	<a href="http://www.rivaspain.com">www.rivaspain.com</a>
<b>Maintenance Instructions</b>	<a href="http://www.rivaspain.com">www.rivaspain.com</a>



# RIVA QUARTZ

**Pearl**                      **3.5"**                      **Select**  
Name                      Width                      Grade



## DESCRIPTION

This product has been manufactured according to the European Norm EN13489. Product: Multilayer Parquet Oak Plank.

## COMPOSITION

Structure consists of a Birch Phenolic Plywood and an Oak Plank Top Layer, both elements glued with polyvinyl acetate adhesives, in accordance to the qualification CARB2.

## DIMENSIONS

<b>Total thickness (in)</b>	5/8" (16mm)
<b>Top Layer thickness (mm)</b>	3.2 mm
<b>Plywood thickness (mm)</b>	12 mm
<b>Length (ft)</b>	21.25" (540 mm)
<b>Width (in)</b>	3.5" (90mm)

## DIMENSIONS TOLERANCES (EN 13647)

<b>Length</b>	Nominal $\pm$ 0.1%
<b>Width</b>	Nominal $\pm$ 0.2%
<b>Cupping</b>	0.2% of nominal width
<b>Banana</b>	0.1% nominal length

## GRADE


Select. Minimal knots.  
Maximun diameter of 10 mm and repaired with filler.  
Character solid knots up to 3" (70mm) permitted. Open knots with fill less than 2" (50mm) permitted. Repaired cracks or splits within the planks are permitted. No filled cracks/splits on the ends of the planks. Natural color variation is to be expected. Sapwood may be present and allowed if the color blends into the plank. No bleached sapwood allowed.

<b>Finished</b>	Bona® Ultra Matt Lacquer
<b>Impact Resistance</b>	Ø medium of deep 8.59 mm
<b>Dimensional Stability (EN-1910):</b>	Movement $\leq$ 0.29%
<b>Formaldehyde Emission (EN-120)</b>	EO. CARB2 Comply
<b>Thermal conductivity (UNE-92-202)</b>	0.14W/moK
<b>Noise &amp; Impact Isolation (UNE-EN-ISO 140-8)</b>	$\Delta$ Lw: 17 dB
<b>Fire Reaction (UNE 23727)</b>	Cfl-S1
<b>Profiling System</b>	Tongue & Groove, beveled 2 sides
<b>Warranty</b>	<a href="http://www.rivaspain.com">www.rivaspain.com</a>
<b>Maintenance Instructions</b>	<a href="http://www.rivaspain.com">www.rivaspain.com</a>



# RIVA QUARTZ

**Crystal**      **3.5"**      **Select**  
Name              Width              Grade

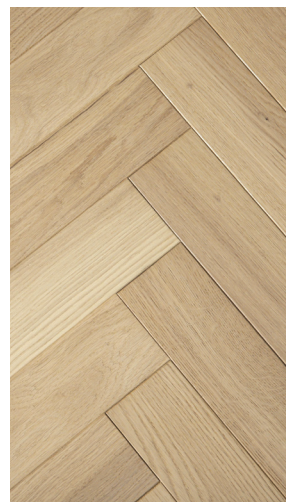

## DESCRIPTION

This product has been manufactured according to the European Norm EN13489. Product: Multilayer Parquet Oak Plank.

## COMPOSITION

Structure consists of a Birch Phenolic Plywood and an Oak Plank Top Layer, both elements glued with polyvinyl acetate adhesives, in accordance to the qualification CARB2.

## DIMENSIONS

<b>Total thickness (in)</b>	5/8" (16mm)
<b>Top Layer thickness (mm)</b>	3.2 mm
<b>Plywood thickness (mm)</b>	12 mm
<b>Length (ft)</b>	21.25" (540 mm)
<b>Width (in)</b>	3.5" (90mm)

## DIMENSIONS TOLERANCES (EN 13647)

<b>Length</b>	Nominal $\pm$ 0.1%
<b>Width</b>	Nominal $\pm$ 0.2%
<b>Cupping</b>	0.2% of nominal width
<b>Banana</b>	0.1% nominal length

## GRADE

Select. Minimal knots.  
Maximun diameter of 10 mm and repaired with filler.  
Character solid knots up to 3" (70mm) permitted. Open knots with fill less than 2" (50mm) permitted. Repaired cracks or splits within the planks are permitted. No filled cracks/splits on the ends of the planks. Natural color variation is to be expected. Sapwood may be present and allowed if the color blends into the plank. No bleached sapwood allowed.

<b>Finished</b>	Bona® Ultra Matt Lacquer
<b>Impact Resistance</b>	Ø medium of deep 8.59 mm
<b>Dimensional Stability (EN-1910):</b>	Movement $\leq$ 0.29%
<b>Formaldehyde Emission (EN-120)</b>	EO. CARB2 Comply
<b>Thermal conductivity (UNE-92-202)</b>	0.14W/moK
<b>Noise &amp; Impact Isolation (UNE-EN-ISO 140-8)</b>	$\Delta$ Lw: 17 dB
<b>Fire Reaction (UNE 23727)</b>	Cfl-S1
<b>Profiling System</b>	Tongue & Groove, beveled 2 sides
<b>Warranty</b>	<a href="http://www.rivaspain.com">www.rivaspain.com</a>
<b>Maintenance Instructions</b>	<a href="http://www.rivaspain.com">www.rivaspain.com</a>

